

Conductivity/Resistivity probes with two electrodes Models 8315 / 8316 / 8317



k = 0.01
(8315)



k = 0.1
(8316)



k = 1
(8317)



Stainless steel
Flow-through chamber
(8318.1)

Applications

- Pure water production monitoring (ion exchangers, distillators)
- Process water monitoring (condensates, cleaning cycles, heat exchangers)

Benefits

- Mechanical and chemical strength
- IP65 protected connector cable (100°C continuous, 150°C max.)
- Wide measuring range
- Cell constant determined according to ISO 7888 and ASTM D 1125
- Quick response time
- Built-in temperature sensor

data sheet

Belgium
 Lange Group
 Ragheno Business Center 2
 Motstraat 54
 B-2800 Mechelen
 Tel.: (32) 15 42 35 00
 Fax: (32) 15 41 61 20

Germany
 Dr Bruno Lange GmbH
 & Co. KG
 Prozeß-Meßgeräte /
 Polymetron
 Willstätterstrasse 11
 D-40549 Düsseldorf
 Tel.: +49 211-5288 156
 Fax: +49 211 5288 171

India
 Forbes
 A 34/35, MIDC Estate
 "H" Block
 Pimpri, Pune 411 018
 Tel.: (91) 212-770-171
 Fax: (91) 212-777-049

Italy
 Dr Bruno Lange srl
 Via Riccione, 14
 20156 Milano MI
 Tel.: (39) 02 39 23 14 1
 Fax: (39) 02 39 23 14 39

Netherlands
 Lange Group
 Laan van Westroijen 2a
 NL-4003 AZ Tiel
 Tel.: (31) 344 63 11 30
 Fax: (31) 344 63 11 50


Spain
 Neurtek M.A.
 Lange Group
 C/ Araba 45
 Apdo. 220
 Zarautz 20800
 Tel.: (34) 943 89 43 79
 Fax: (34) 943 130 241

United Kingdom
 Dr Lange (UK) Ltd
 Lennox Rd
 Basingstoke, Hampshire
 RG22 4AP
 Tel.: (44) 1 256 33 3403
 Fax: (44) 1 256 633 0724


USA
 Astro / Polymetron
 Associated with Hach Co.
 P.O. Box 389
 Loveland, Colorado
 USA 80539-0389
 Tel.: (1) 800 227 2648
 Fax: (1) 970 461 3920

Specifications

1- Cables



2- Accessories

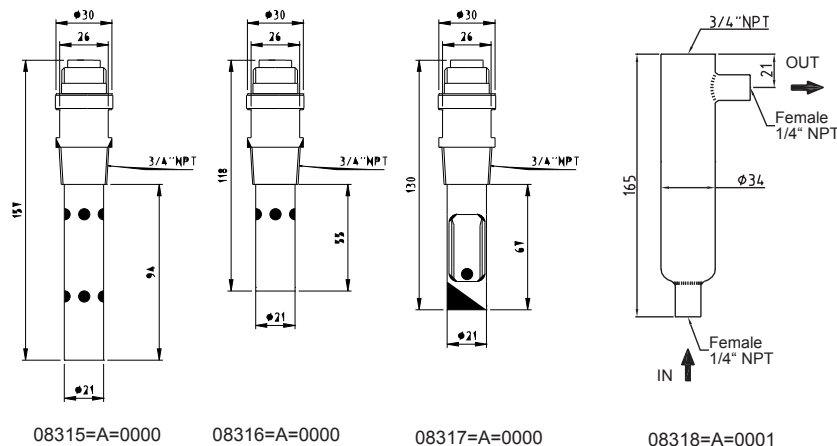

Model

Sample	8315 / 8316	8317
Tmax.	150°C (302°F) at 25 bar (362.5 psi)	150°C (302°F) at 25 bar (362.5 psi)
Pmax.	25 bar (362.5 psi) at 150°C (302°F)	25 bar (362.5 psi) at 150°C (302°F)
Mounting	in 3/4" NPT threading	in 3/4" NPT threading

Materials

Model	8315 / 8316	8317
Body (upper part)	SSt 316L	SSt 316L
Internal electrode*	SSt 316L	Graphite
External electrode*	SSt 316L	Graphite
Insulator*	PES	PES
O-ring*	VITON®	VITON®
Connector	Glass Polyester / IP65	Glass Polyester / IP65

* Part in contact with fluid

VITON® is a registered trademark of E.I. DUPONT DE NEMOURS and Co.

Measuring range

Cell constant (K)	9125 transmitter	8920/8964/8964 γ transmitters
0.01 cm ⁻¹	0.01µS/cm–200µS/cm	0.01µS/cm–100µS/cm
0.1 cm ⁻¹	0.1µS/cm–2mS/cm	0.1µS/cm–1mS/cm
1 cm ⁻¹	1µS/cm–20mS/cm	1µS/cm–10mS/cm

The cell constant is determined within +/-2% accuracy.

Accessories

cables

Model	Length	Part number
8319.5	5 m/16 ft	08319=A=0005
8319.10	10 m/33 ft	08319=A=0010
8319.20	20 m/66 ft	08319=A=0020

Flow-through chamber

Tmax.	150°C, 25 bar (302°F, 362.5 psi)
Pmax.	25 bar, 150°C (362.5 psi, 302°F)
Connections	1/4" NPT threading
Material	Stainless steel 316L

This publication is not intended to form the basis of a contract and the company reserves the right to amend the design and specifications of the instruments without notice.

Distributor

TE 8315=A=100 - Rev. D - FR. 50622048726

